


7072 MA

schoen + sandt

**Elektro-hydraulischer
Karrenbalkenstanzautomat**

***Electro-hydr. Automatic Crosshead
Die Cutting Machine***

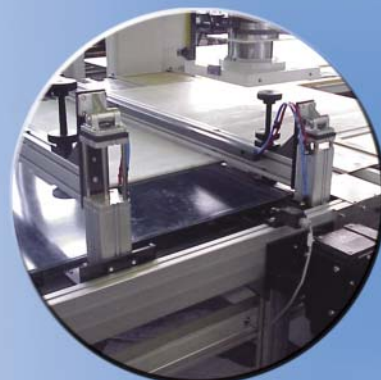

STANZMASCHINEN

Elektro-hydraulischer Karrenbalkenstanzautomat 7072MA

Ausgeführt in Stahlschweißkonstruktion.
Mit motorisch über Rollenkette angetriebenem Stanzkarren, welcher unter der Brücke der Maschine über die Durchgangsbreite verfahrbar ist.

Die Stanzbewegung und der Rückhub erfolgen hydraulisch.

Mit Stanzplattenverschiebeeinrichtung.

Mit MesserhöhenEinstellung.

Auf der Rückseite ist aus Sicherheitsgründen eine Tischverlängerung und ein Plexiglasschutz oder eine Vorschubeinheit mit Schutzeinrichtung angebaut.

Electro-hydr. Automatic Crosshead Die Cutting Machine 7072MA

Welded steel construction.

With motorized via roller chain driven crosshead, traversing underneath the beam between the support columns of the machine.

Cutting stroke and return stroke are actuated hydraulically.

With cutting board oscillation device.

With cutting die setting.

For safety reasons a fixed plexiglass guard and a table extension are installed at the rear side of the machine, or with feeding device and guarding equipment.

Lieferbare Zusatzeinrichtungen:


Walzenvorschub

Klemmbalkenvorschub

Available options:

Roller feed

Clamping beam feed

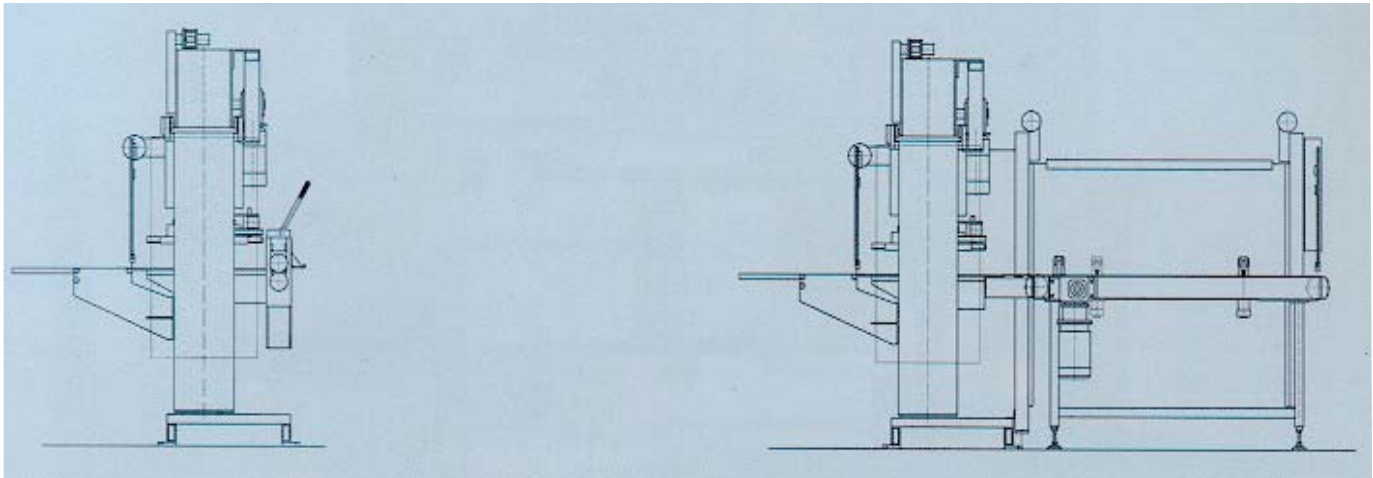

Typ 7072MA	Stanzkraft kN (Mp)	Stanzfläche mm x mm nutzbar	Durchgangshöhe max. mm	Hub, verstellbar mm	Stanzbreite mm	Motor- leistung kW/HZ	Öl- Bedarf	Masch. gewicht
type 7072MA	cutting force kN (Mp)	cutting area mm x mm useable	daylight max. mm	stroke, adjustable mm	cutting width mm	motor drive kW/cps	oil- require- ment	mach. weight
180.50	250(25)	1560x500	150	20 - 120	1560	2,2/3,6	85	ca.2400
200.50	250(25)	1760x500	150	20 - 120	1760	2,2/3,6	85	ca.2400
200.65	250(25)	1760x650	150	20 - 120	1760	2,2/3,6	85	ca.2400
225.65	250(25)	2020x650	150	20 - 120	2020	2,2/3,6	85	ca.2400
250.65	250(25)	2270x650	150	20 - 120	2270	2,2/3,6	85	ca.2400

- technische Änderungen vorbehalten / *subject to technical modifications* -